





REVISIONS		
REV.	DESCRIPTION	DATE




8-32 UNC  
2B Thread



Internal M8x1  
Thread



External M8x1  
Thread

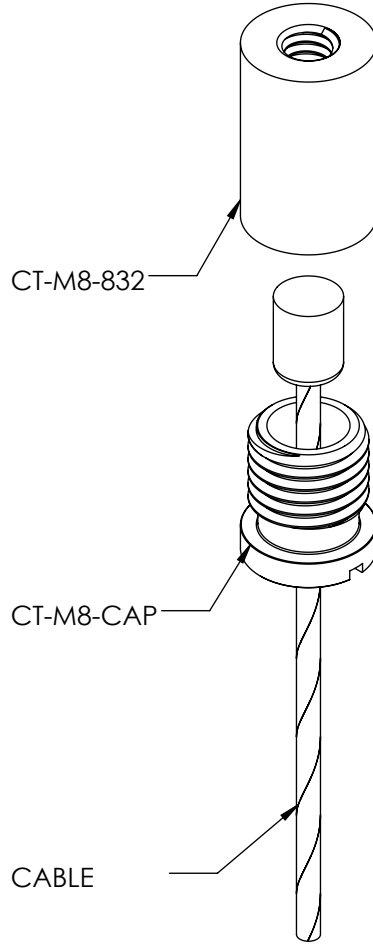

Unless otherwise specified  
 1. Dimensions are in inches  
 2. Tolerances are:  
 .XX ±.01 .XXX ±.005 Angles 1°  
 3. Break all edges .005 min  
 4. Finish 63 micro inches  
 5. Dimensions apply after finish  
 6. Concentricity = .025 TIR

**PROPRIETARY AND CONFIDENTIAL**

This drawing and these specifications are the exclusive property of GRIPLOCK SYSTEMS LLC. and shall not be divulged, reproduced, copied, or used as the basis for the manufacture or sale of apparatus without the express written authorization of GRIPLOCK SYSTEMS LLC.

DRAWN BY SID REV INT  
 CHECKED BY

REF: DATE: 04/18/2016  
 MATERIAL: VARIOUS  
 SCALE: 2:1 FILE: cc-m8-832 assy



**GRIPLOCK SYSTEMS**

793 Duncan Reidville Rd. Duncan, SC 29334  
 Phone (805) 566-0064 Fax (805) 566-0065

PART NUMBER: RT-CC-M8

DESCRIPTION: M8 Coupler with 8-23 Connector